


AdjusTables Series 5

Page 1 of 2

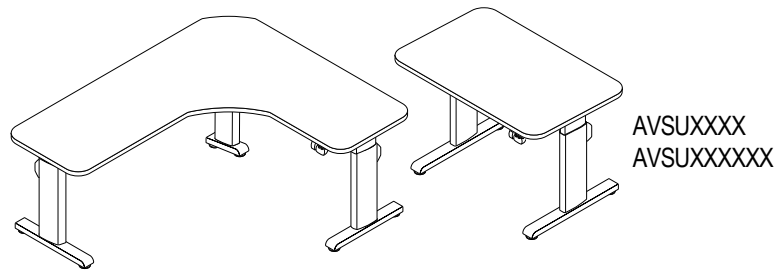

The requirement is that the tables are serviceable in both sitting and standing postures, by users ranging from 5' 0" to 6' 4". Details will provide adjustable height tables to the following specifications:

Adjustment:

- 3-stage synchronized lifting columns with integral shrouding
- Push button height adjustability
- Infinite height adjustment within the range
- 2" diameter glides have .5" of height adjustment for surface leveling on uneven floors

Performance & Specification:

- Height Range - 25.5" - 52" (assumes .5" glide adjustment)
- Travel Speed - 1.7" per second
- Load capacity not dependent on weight distribution
- 220 lbs. dynamic load bearing capacity per table (including the worksurface)
- Lifting column controlled by single switch to ensure synchronization
- Electrical - 120V, 60 Hz, Single phase, 4A, 10% duty cycle

Top Constuction:

- Top core is manufactured from 45 pound particle board
- Tops are surfaced in High Pressure Laminate
- All Laminate tops are edge banded in a coordinating color to the Laminate selection
- All tops are reinforced where necessary
- Available in Straight and 90° Corner configurations
- All assemblies meet or exceed ANSI/BIFMA standards
- Available in 23" and 29" depths in Straight; 23" only in 90°
- Maximum table size is 70" x 70" at a 23" depth
- Tops can have an optional keyboard support mounted
- Tops have a 1" gap between rear and panel face for clearance and cable access
- A molded wire management channel is included for each worksurface rear edge
- Vertical wire management is available
- Standard 31 Steelcase laminates supported. See Page 2 for complete list.

For a better day at work.™

details®

A STEELCASE COMPANY

P.O. Box 1967 / CD-5E / Grand Rapids, MI 49501-1967 / www.details-worktools.com

©2006 Office Details Inc. All rights reserved. Printed in U.S.A. 11/06

AdjuSTables Series 5

Page 2 of 2

Column Construction:

- Rigid design maximizes floor space without sacrificing stability
- Low profile column construction
- Full clearance under the worksurface
- Electronics are UL and CUL recognized components
- Molded-in wiring harnesses
- Ships KD - Minimal tools required for assembly
- DC motors ensure smooth, quiet operation

Terms & Conditions:

Warranty:

Worksurface - Lifetime

Lifting columns and electronics - 5 years

Leadtime:

Standard - 4 to 6 weeks upon order acknowledgement

Quickship - Project specific

Specials - Anything not included in the above, including COL

All leadtimes subject to change based on business conditions.

Returns: Standard returns policy applies

Freight: Pre-paid

Product ships K.D. Final assembly and Installation costs should be considered separately.

Standard Laminate Recommendation:

2412 Natural Cherry	2746 Black	2822 Woodrose Speckle	2857 Stream Fiber
2421 Medium Cherry	2759 Warm White	2823 Driftwood Speckle	2859 Novell Fiber
2511 Winter on Maple	2771 Medium Mahogany on Walnut	2824 Smoke Speckle	2860 Granite Fiber
2592 Blond on Maple	2810 Dawn	2825 Vanadium Speckle	2870 Blonde Bronze Patina
2632 Medium Oak	2811 Mist	2850 Vanadium Fiber	2871 Blackened Bronze Patina
2711 Natural Walnut	2820 Coffee Speckle	2851 Rhyme Fiber	2872 Silver Plate Patina
2722 Cream	2821 Black and White Speckle	2852 Tungsten Fiber	2873 Instant Iron Patina
2729 White Sand		2854 Vellum Fiber	
2730 Arctic White			

Note: The 3mm edge band color is the standard Steelcase color choice. For a complete list of default edge trims, contact Customer Alliance. If a different color combination is desired it must be quoted as a Custom product in order for the system to recognize the difference.

COL: Any laminate color other than the standard 31 listed above will be considered a COL (Customers Own Laminate). Contact Details Custom Solutions for specifics.

For a better day at work.™

details®

A STEELCASE COMPANY

P.O. Box 1967 / CD-5E / Grand Rapids, MI 49501-1967 / www.details-worktools.com

©2006 Office Details Inc. All rights reserved. Printed in U.S.A. 11/06