


L I G H T
S P A C E



AN ULTRA-THIN PENDANT UPLIGHT SYSTEM PIVOTS 60 TO 240 DEGREES DUE TO ITS UNIQUE KNUCKLE,
CONNECTING THE 1.85" SQUARE EXTRUSIONS. THE KNUCKLE ALLOWS MULTIPLE CONFIGURATIONS. USE LIGHT
TO TURN CORNERS AND CREATE TRAFFIC PATHS IN LONG CORRIDORS. SHOWN IN GOSSAMER ALUMINUM.

ARTICULATING
RAIL

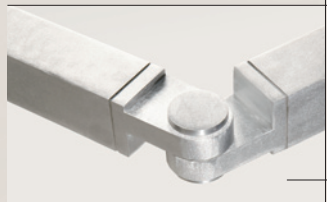

1.85" W
4/8/12' L

45002

Overview


- Ultra thin pendant system can pivot from 60° to 240° due to its unique “knuckle” mechanism that connects the 1.85” extrusions.
- The “knuckle” feature allows you to create a multitude of configurations including triangles, squares and zig-zags, etc.

Applications

- Private offices
- Conference rooms
- Public areas, corridors
- Professional offices
- Home offices

Options

- Length: 4', 8' or 12' nominal
- Lamping: 54W T5 available with dimming ballast
- Finish: Gossamer aluminum or custom color match
- Power cord: Stainless steel braided power cord standard
- End caps: Standard flat or optional diamond-shaped
- Suspension: Ultra-fine 0.05" aerial cable standard
Field adjustable suspension from 12" to 36" standard.
Longer suspension heights available.

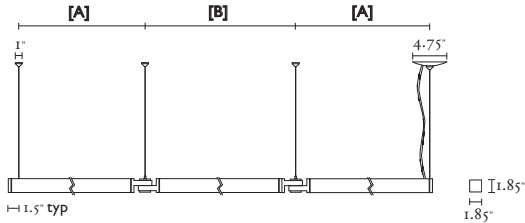

Cable Suspension
Suspension points centered 1.5" from end of fixture. *


Fixture Dimensions

	[A] Centerline from knuckle to end cap	[B] Centerline from knuckle to knuckle
4 feet	53.50"	56.50"
8 feet	100.50"	103.50"
12 feet	147.50"	150.50"

* Add 3.0" for overall length.

Net Weight

- 4' = 5 lbs.
- 8' = 10 lbs.
- 12' = 15 lbs.

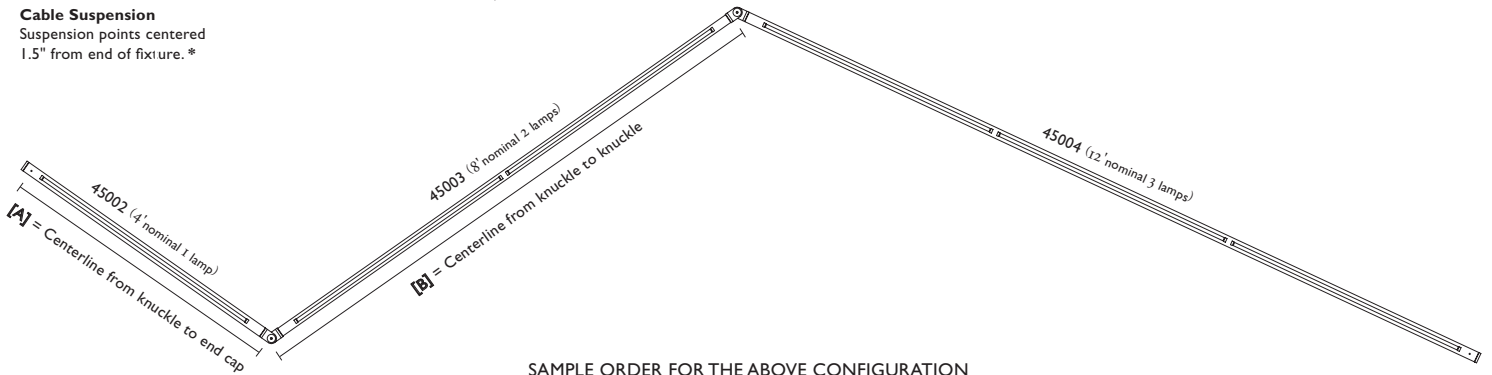


SAMPLE ORDER FOR THE ABOVE CONFIGURATION

45002 + 1 + 45003 + 1 + 45004 + 1 + 54W + G/A + C36 + IL

4' upright qty 1 and 8' upright qty 1 and 12' upright qty 1 all with 54W non-dimming, gossamer aluminum finish, 36" cable suspensions and T5 lamps.

POSSIBLE CONFIGURATIONS

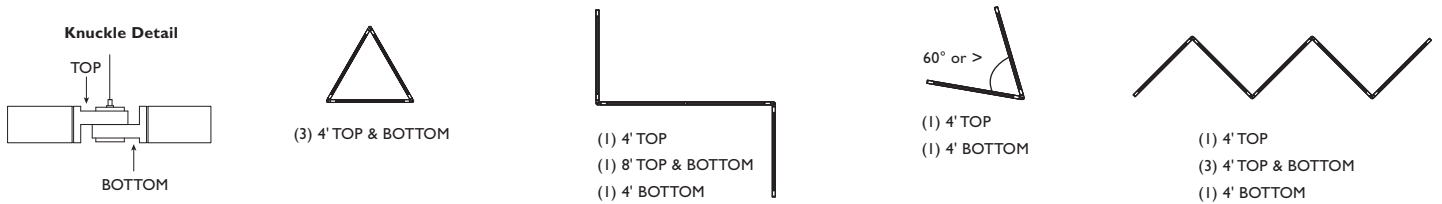

NOTE: Consult your local rep for other configurations. Photometry results shown on tearsheet 45000. You may also download the complete IES file at www.architecturallighting.com.

EASY ORDER BUILDER

Create your own specification by choosing from the following options:

Item + Quantity + Lamping + Finish + Suspension / HOA + Other Options

Sample order for the above configuration: 45002 + 1 + 45003 + 1 + 45004 + 1 + 54W + G/A + C36 + IL

4' upright qty 1 and 8' upright qty 1 and 12' upright qty 1 all with 54W non-dimming, gossamer aluminum finish, 36" cable suspensions and T5 lamps.

Item #	Quantity	Lamping	Finish	Suspension / HOA	Other Options
45002 (4')	Please Specify	Non Dimming (120v-277v): 54W 54WTS (HO)	G/A Gossamer Aluminum	C36 Cable Adjusts to 36"	N None
45003 (8')		Dimming: 54WD-120v 54WTS (HO) 54WD-277v 54WTS (HO)	C/X Custom Color Match	Longer HOA on request	DE Diamond-shaped end caps
45004 (12')					EC Additional 4" canopy (non-power feed) IL Installed T5 lamps (3000K color temp)

A dimensioned sketch with power feed location indicated is required with your order.

UL listed. Printed July 2006. Specifications subject to change; consult our website for up-to-date information. © 2005 LIGHT SPACE®
FOB Colorado Springs, CO. Designed by Doyle Crosby. Patent pending.